

Funnels and Measures

Model 719



4-Quart Galvanized Measure with flexible spout.

Model 757



5-Quart Polyethylene Measure with flexible spout.

Model 764



Heavy-Duty Polyethylene Funnel designed for diesel fuel. Special screen separates most of the water droplets from the fuel. 10 inches X 7 inches at top.

Model 799



E-Z Smart funnel

Features:

2 Gallon Capacity

Funnel design protects against overfilling the drum.

Funnels and Measures

Model 745



5-Quart Flow Control measure with flexible metal spout.

Model 770



Deluxe Flexible Plastic Funnel. 11" flexible hose with wide neck for rapid filling. For use in hard-to-reach places.

1803



Galvanized speed funnel. Accepts almost all liquids except for strong acids. Large 1 1/2" outlet with an anti-swirl fin. Leak proof galvanized steel construction.

Barrel Faucets

Model 68



Plastic Bung Faucet for $\frac{3}{4}$ " NPT bung opening.

Model 67



Plastic Bung Faucet for 2" NPT bung opening.

Model 81





Barrel Faucet - Die-cast metal bung faucet for $\frac{3}{4}$ " NPT bung opening in steel drums or barrels. Self-closing. Has hole for padlock (padlock Not furnished).

Suction Wand Stingers



Custom designed aluminum hand held suction wands. Used for evacuating sumps and pits of liquid and industrial waste materials. Available in 1" through 4" in custom lengths and configurations. Available with or without handles. See ordering information below.

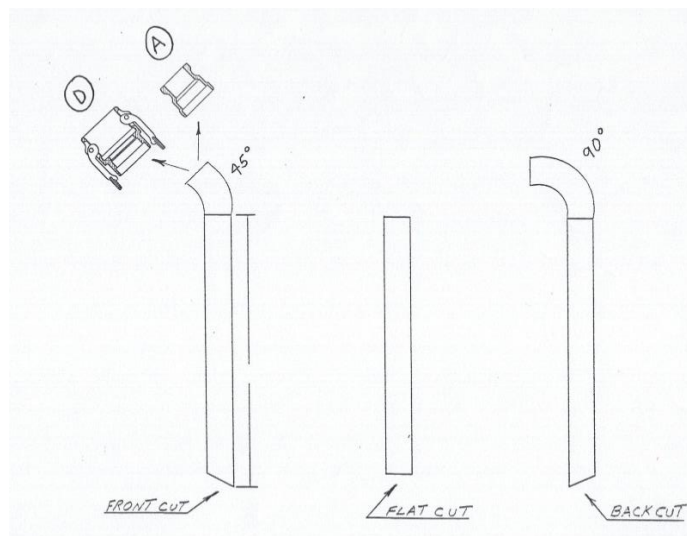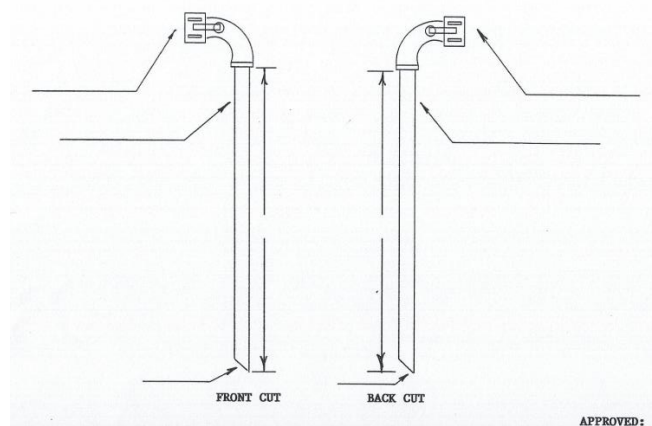

Fittings and Flanges



Schedule 40 and 80 NPT pipe fittings. Available in all sizes black, galvanized, stainless steel, brass, and aluminum



Pipe available in stock lengths. Available in black, galvanized, stainless steel, and aluminum. In all sizes.



Flanges available in blind threaded and slip on configurations. Available in all sizes. Also in steel, cast iron, aluminum, stainless steel, and PVC materials. In 150 lb., 300 lb., and T.T.M.A. patterns.

Hydraulic and Pneumatic Fittings



37° JIC hydraulic fittings. Available in all sizes.
Available in steel.

Quick Disconnects



Available in ¼"-1" sizes. Available in steel, brass, and
stainless steel. In a variety of pressure ratings.

Pneumatic Quick Disconnects



Available in ¼" - ½" in steel, brass, and stainless steel.
In Industrial, Aro, and Lincoln mating configurations.

Pressure Regulators, Filters, and Lubricators

Mini Pressure Regulator



Mini pressure regulator, filter, and gauge.
Available in 1/8" and 1/4".

Combination Pressure Regulator



Combination pressure regulator, filter, and
lubricator. Available in 1/4" - 1 1/2".

Water Pressure Regulators




Balanced valve minimizes effects of the inlet
pressure variations on outlet pressure. Body,
valve, and bottom plug are brass. Bonnet is
aluminum and steel. Elastomers are nitrile.

Cinch Straps



Velcro straps. Available in various sizes.

Static Grounding Strap



Static drag straps are used behind trucks, tow motors, or any vehicle to dissipate static. 1" and 2" widths available. Standard lengths are 18", 20", 22", 24", and 25".

Static Grounding Reel



Static ground reel used in vehicles or in plant for drumming purposes or whenever a static condition may cause volatility. Available in a variety of lengths.

Clamps

Punch Lok Clamps and tools



High strength galvanized carbon steel hose clamps will satisfy nearly any performance requirements. Stainless steel hose clamps are for use with more corrosive liquids and materials like acids. Available in a variety of sizes.

Worm Gear Clamp



Available from 7/16" through 20" in steel and stainless steel construction.

T Bolt-Style Clamp



Available from 2"-17" in stainless steel construction.

Double Bolt Clamps



Available in 3 1/2"-17 1/2" in plated iron.

Thread Sealants

Soft Set Thread Sealant with PTFE



Soft-setting, non-toxic, PTFE paste. Provides a positive seal on pipe threads, joints, fittings, hoses, nozzles, LPG cylinders, pump assemblies, oil burners, hydraulics, compressors, engines, motors, housings, plugs, fuel lines, couplings and more. Use on brass, copper, stainless steel, aluminum, black pipe, tin, galvanized, ABS, CPVC, PVC plastics, nylon, polyethylene, polypropylene, polybutylene and more. Excellent resistance to gasoline (up to 20% alcohol and petroleum blends), petroleum solvents, kerosene, diesel oil, propane, butane LPG, cutting oils, ammonia, aliphatic solvents, acids, steam, potable water, compressed air and more. NOT for use on oxygen. Remains pliable in cold temperatures. Temperature Range: -100°F to 600°F (-74°C to 318°C). Pressure Range: To 10,000 psi sealing liquids; to 3,000 psi sealing gases. One year shelf life when stored at 40°F to 80°F (5°C to 27°C). For alcohol blended gasoline (ethanol). For use on NPT Threads.

Gasoila-100 Soft Set Thread Sealant for Corrosive Chemicals



Soft-setting, black sealant works where conventional thread sealants fail. Excellent performance with systems handling 100% methanol, ethanol, alcohol and ideal for concentrated or dilute acids and caustic alkali, compressed air, aromatic solvents, glycol/water solutions, coal tar, naphtha, cutting oils, ethylene glycol and ketones. NOT for use on ethanol blended gasoline. (Less than 100% ethanol). NOT for use on plastic pipe or oxygen. Use on thoroughly clean, dry threads. Temperature Range: -50°F to 450°F (-46°C to 234°C). Pressure Range: To 5,000 psi for gases; to 10,000 psi for liquids. One year shelf life when stored at 40°F to 80°F (5°C to 27°C). For use on NPT Threads.

Gasoila E-Seal Thread Sealant Soft Set with PTFE



Non-hardening, non-toxic, opaque, dark green paste designed specifically for ethanol blended gasoline including E10 and E85 (for 100% ethanol or 100% methanol applications - use Gasoila 100). Provides a positive seal on pipe threads, joints, fittings, hoses, nozzles, pump assemblies, oil burners, hydraulics, bolts, compressors, engines, motors, fuel lines and couplings. For use on brass, copper, stainless steel, aluminum, black pipe, tin and galvanized pipe. Excellent resistance to gasoline, ethanol blended gasoline such as E10 and E85, petroleum solvents, kerosene diesel oil, Biodiesel propane, butane, LPG, cutting oils, ammonia, aliphatic solvents, acids and steam. NOT for use on oxygen. Temperature Range: -100°F to 600°F (-74°C to 318°C). Pressure Range: Up to 10,000 psi when sealing liquids and up to 3,000 psi with gases. UL Classified. For use on NPT Threads.

Lid Pullers



Available in 25-½" and 35" lengths. Made in USA with domestic steel.

Bag-O-Rags



- Reclaimed T-Shirt rag material
- Various mixed colors
- Approximately 80 rags per bag
- Slices across the top for easy dispensing
- 100% cotton
- 10 lb. bag

Gaskets and O-Rings



We offer a variety of hose gaskets, flange gaskets, and o-rings for the petroleum, chemical, and dry bulk industry. Available in all sizes and a variety of materials. Please call with your specific needs.