

Kamlock Cam and Groove Couplings



Part A
Male Adaptor X Female Thread



Part E
Male Adaptor X Hose Shank



Part B
Female Coupler X Male Thread



Part F
Male Adaptor X Male Thread



Part C
Female Coupler X Hose Shank



Part DC
Dust Cap



Part D
Female Coupler X Female Thread



Part DP
Dust Plug

Available in 1/2"-8" sizes. Available in Aluminum, Brass, Stainless Steel, Ductile Iron, Polypropylene, Nylon, and other alloys upon request.

Specialty Cam and Groove Kamlocks



A-Reducer
Adaptor X Female NPT Thread



F-Reducer
Adaptor X Male NPT Thread



B-Reducer
Coupler X Male NPT Thread



CXA Short Reducer
Coupler X Adaptor



C-Reducer
Coupler X Hose Shank



CXC
Coupler X Coupler



D-Reducer
Coupler X Female NPT Thread



SA Spool Adaptor
Adaptor X Adaptor



E-Reducer
Adaptor X Hose Shank



Positive Locking Safety
Coupler



Swivel Cam and Groove

Dry Break Quick Couplers

Kamvalok® 1700DL Series Coupler



OPW Kamvalok® Dry Disconnect Couplings are considered the standard of the industry. Used at liquid transfer points where product loss could occur, OPW Kamvaloks® provide a reliable solution to prevent spillage during connection or disconnection. Available in 1 ½"-3". Available in aluminum, stainless steel with Buna, Viton, and Teflon seals.

1600AN Series Adaptor



The 1600AN Series Adaptor is specifically designed to mate with OPW Kamvalok® Couplings to help prevent liquid spillage during the connection/disconnection process. The adaptor contains a spring-loaded poppet to assure fast closing and a tight seal. Available 1 ½"-3". Available in aluminum, stainless steel with Buna, Viton, and Teflon seals.

Drylok™ Dry Disconnect Coupler and Adaptor



Drylok™ is designed to safely transfer hazardous corrosive, volatile liquids such as acids, solvents and petrochemicals. An interlocking handle averts accidental spills by preventing uncoupling while the valve is open. And, the unit's flat face minimizes fluid loss, further reducing exposure to risk during operation. Drylok™ is ideal for all kinds of hazardous fluids where product loss is a problem, such as high-pressure lines, high flow rates, slurries, and gases. Available in 1", 2", and 3". Available in Stainless steel, Alloy 20, and Hastelloy C.

Dry Break Quick Couplers

BC 61 Series



Used with Emco Wheaton style dry break commonly found in the fuel and lube oil service industry. Available in 2" and 3". Available in Bayonet style straight coupler x female Thread.

BA31 Series



Used with Emco Wheaton style dry break commonly found in the fuel and lube oil service industry. Available in Bayonet style adaptor X female thread.

Parker 60 Series

Industrial Hydraulic Quick Connect Coupler



On hose assemblies, pressure rating is the lower of either the rating of the coupling or the hose at 70°F. Available in ¼"-1". Available in steel, brass, and stainless steel.

Industrial Hydraulic Quick Connect Plug



On hose assemblies, pressure rating is the lower of either the rating of the coupling or the hose at 70°F. Available in ¼"-1". Available in steel, brass, and stainless steel.

Quick Disconnects

MC3092

Type B Quick Connect



Bauer Style, Available in 2"-12". Available in Galvanized Steel.

FC3102

Type B Quick Connect



Bauer Style, Available in 2"-12". Available in Galvanized steel.

Hose Shank Fittings

King Combination Nipple

STC100



Available in ½"-12". Available in steel, stainless steel, and brass. Available NPT, NH, and groove configurations. Available in long shank and short shank.

SD20- Hose Shank Couplings



Available in 1 ¼"-4". Available in stainless steel, steel, and brass. Available in NPT and NH. Available in long shank and short shank.

Air Hose Accessories

Air Regulator and Filter B07-202MG



- Available in 1/8" and 1/4"
- 5-100 PSI range
- Relieving type
- 5 micron element
- 1 oz. reservoir
- Push to lock adjusting knob
- inlet pressure 150 PSI maximum at ambient temperature (70°F)
- models supplied with a GC620 gauge

Wilkerson Standard Combination Unit with Transparent Bowl and Guard C26 Series



Available 1/4", 3/8", and 1/2".
Maximum operating conditions 150 PSIG
Maximum 32°F-125°F
Transparent Bowl, metal bowl available

Air Chief Quick Disconnects DC Series



Available in 1/4"-3/4". Available in Industrial, Auto, ARO Series.

Air Chief Quick Connect Plug



Available in 1/4"-3/4". Available in Industrial, Auto, ARO Series.

Strainers

Round Hole Strainer

RHS25



Available in 1 ½"-12". Available in plated steel and other materials upon request.

Square Hole Strainer

SHS25



Available in 1 ½"-4". Available in plated steel and other materials upon request.

Long Thin Strainer

RSS25



Available in 1 ½"-4". Available in plated steel and other materials upon request.

Bottom Skimmer Strainer

DSB25



Available in 1 ½", 2", and 3". Available in plated steel and other materials upon request.

Polyethylene Strainers

TSS20




Available in 1 ½"-3". Available in Black Polyethylene.



Hannay Reels®
The reel leader.

**PUT THE HARDEST
WORKING REELS TO
WORK FOR YOU**

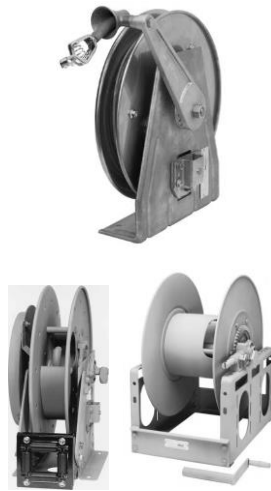

**STANDARD AND CUSTOM
HOSE REELS AVAILABLE
UPON REQUEST, CALL FOR
SPECIFIC NEEDS**



**Hannay
Reels**
The reel leader.



Kamlock Couplers and Adaptors

