
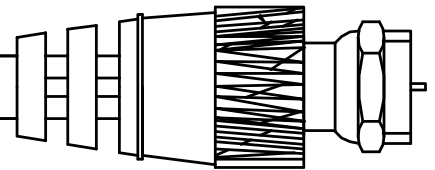
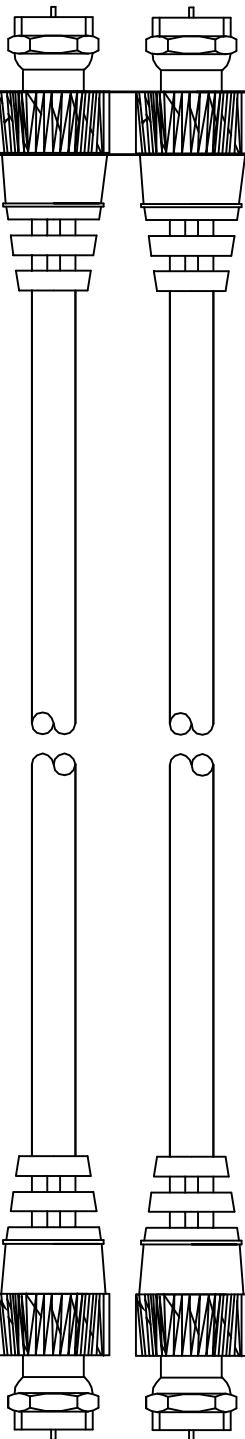


# DATA SHEET

## COAXIAL CABLE



### RG-59/U - 2.0 METRE - WHITE FLAME RETARDANT

INNER CONDUCTOR	COPPER CLAD STEEL 0.81MM	
DIELECTRIC	FOAMED POLYTETHYLENE 3.66MM	
ALUMINIUM FOIL	SEALED APA TAPE 3.86MM	
BRAID	67% ALUMINIUM 4.47MM	
JACKET	EVA MATERIAL WITH LSZH FLAME RETARDANT 6.10MM	
ATTENUATION (dB/100m)	LOSS	RETURN LOSS (dB/100m)
50MHz	6.8	5mHZ - 42
100MHz	8.9	100mHZ - 50
200MHz	12.7	200mHZ - 38
300MHz	15.4	300mHZ - 36
		400mHZ - 44
400MHz	17.8	500mHZ - 40
450MHz	19.1	600mHZ - 40
550MHz	21.1	700mHZ - 30
750MHz	24.8	800mHZ - 35
800MHz	25.7	900mHZ - 31
1000MHz	29.0	1GHZ - 30

